



The new integrated pumping solutions,
with state-of-the-art TwisTorr FS turbo pumps

AGILENT TPS TURBO PUMPING SYSTEMS With TwisTorr FS Technology

The Measure of Confidence



TPS-mini

TPS-compact

TPS-mobile

TPS-bench



Agilent Technologies

Agilent TPS - Turbo Pumping Systems

The New Integrated Pumping Solutions with TwisTorr FS Technology

Powered by Agilent TwisTorr Turbomolecular pumps and backed by Agilent Dry Scroll or Rotary Vane Pumps.

TPS-mini

Portable, dry system with the smallest footprint, featuring the new TwisTorr 84 FS

TPS-compact

TwisTorr 304 FS: best vacuum performance, fast pumpdown time, integrated IDP-3 Dry Scroll Pump

TPS-bench

Table-top solutions, backed by Agilent Dry Scroll Pump or Rotary Vane Pump

TPS-mobile

Roll-around carts, high capacity systems, wide pumping speed range

Customized configurations on request



IDP-3 Dry Scroll Pump

- The most compact and light scroll pump in the market
- Innovative hermetic design, with motor and bearings outside the vacuum space
- Integrated pump isolation valve
- Cost effective and easy tip-seal replacement



On Board Direct Pressure Reading

- Large pressure reading display
- Torr, Pascal and mbar options
- Ready for FRG-700 Active Gauge




Active Gauge Capability

- FRG-700 Active Full Range combined gauge: Pirani and Cold Cathode from atmosphere to 5×10^{-9} mbar (7×10^{-9} Torr)
- Pressure data available on three independent channels:
 - Serial communication
 - Analog output
 - On board display



TwisTorr FS Technology

High Performance, Innovation, Reliability



Design for Reliability

- A rigorous test regime of product performance, reliability and durability according to Agilent standards
- Environmental Test method (Shock, Humidity, Noise, Temperature, Vibration Tests)
- Reliability assessment on Agilent systems
- Vacuum Test, Life Tests



Manufacturing

- New TPS Manufacturing Line in Agilent Vacuum Products plant in Torino, Italy


Service and Support

- Several levels of Service Programs to help you maximize your productivity: Advance Exchange, Upgrade Program, Factory Repair, Field Support



IDP-15 Dry Scroll Pump

- The next generation 15 m³/h scroll pump, designed for quiet and low vibration operation



User-friendly Interface

- T-Plus software for full PC/Laptop control enables easy data download and graphic display



Agilent Floating Suspension, to ensure:

- Low vibration and acoustical noise
- Extended bearings operating life
- Exceptional stability for demanding applications



Unique TwisTorr stages to deliver the best vacuum performance available:

- High pumping speed and compression ratios for H₂ and He
- High throughput, high foreline tolerance
- Low power consumption, low operating temperature

TwisTorr 304 FS



TwisTorr 84 FS

Agilent TPS - Turbo Pumping Systems

The New Integrated Pumping Solutions with TwisTorr FS technology

The new TPS Turbo Pumping Systems:
just plug and pump!

Portable, fully integrated vacuum solutions, available as light dry bench-top solutions, for small and medium volumes, or high capacity, wide pumping speed range cart versions.


Now available with the innovative, breakthrough TwisTorr FS Turbo Pumps, for outstanding performance and reliability.

Turbo Pumping Systems: key features

Integrated, complete vacuum systems

- Wide range from bench-top to cart versions
- Flexible: broad choice of gauges, valves and components
- Compact and portable: small footprint, light weight
- Enhanced, reliable vacuum performance
- Easy-to-use, simply plug and pump!
- Cost-effective solutions
- Worldwide power configurations and safety standards
- Global Technical, Application and Customer Service support
- Advance Exchange, Upgrade and Repair programs available
- Dry versions: no hydrocarbon contamination, no oil leaks
- **Improved performance and reliability with the new TwisTorr FS pumps**

Applications



High Energy Physics and Research Centers

This new TPS Turbo Pumping System may be used in any laboratory where there is a need to create high vacuum in small-volume chambers quickly and easily. The new generation electronics and the pressure display ensure the accuracy of the process. Agilent TPS are well suited for UHV System pump down, Ion pump roughing, High Vacuum Systems operation, High and Ultra High Vacuum systems bake out.



Electron Microscopy and Mass Spectrometry

The new TPS Integrated Turbo Pumping System are the perfect tool to keep the column of an electron microscope under vacuum while performing maintenance or repair on the device. The oil-free nature of the dry systems guarantees freedom from contamination of the column.

Industrial Applications

The Agilent TPS Turbo Pumping Systems can create and maintain the required vacuum level in separate chamber of an industrial system during maintenance or repair.

The TPS with Dry Scroll Pumps are particularly well suited for evacuating load-lock chambers, or in Medical Accelerators applications. Their oil-free design ensures the purity of the process.

The TPS-mini may be mounted in any position, making it suitable for most systems.

Innovative Vacuum Technologies for Your System



Agilent Rotary Vane Pumps

- Wide pumping speed range from 1.8 to 20.5 m³/h
- Dual stage
- Forced oil circulation
- Gas ballast valve
- Anti-suckback valve and vent device



New TPS Platform with TwisTorr FS Technology The Value of Agilent Quality

- Innovative TwisTorr molecular-drag technology with Floating Suspension
- Outstanding Reliability
- No maintenance required: Agilent Turbo Pumps don't need oil refills
- Higher compression ratio and pumping speed



Agilent Dry Scroll Pumps

- Clean, dry primary vacuum; no maintenance required, simple tip seal replacement
- CE, UL/CUL, CSA and Semi S2-0200 certified
- Isolation valve integrated/included
- IDP-3: the smallest scroll pump in the market; peak pumping speed 3.0 m³/h, ultimate pressure 3.3 x 10⁻¹ mbar
- SH-110: peak pumping speed 5.4 m³/h
- IDP-15: quiet, low-vibration operation; pumping speed 15.4 m³/h (60 Hz), 12.8 m³/h (50 Hz); ultimate pressure 13.3 x 10⁻³ mbar (10 mTorr)



Agilent TPS-mini



A small and compact, easy-to-use, integrated dry vacuum system, featuring the new Agilent TwisTorr 84 FS Turbo Pump with improved vacuum performance, backed by a dry 10 l/min diaphragm pump. Operability in any position, no maintenance required. Active Gauge capability, large pressure display, PC connection. Universal voltage (90V/240V), CE/CSA certified.

Features

- New generation turbomolecular pump TwisTorr 84 FS
- Smallest footprint, lightest weight, compact, dry, clean and robust system
- Universal voltage (90 V/240 V) - CE/CSA certified
- RS-232 or analogical communication
- Wide range vacuum gauge driving capability
- Large pressure data display
- Pressure driven set point, analog set point

Benefits


- Designed for demanding applications
- Cost-effective pumping solution for small volumes
- Easy to use: plug and play system; easy PLC & PC interface
- Compatible with world-wide power configurations
- Complies with world-wide safety standards
- Easy system pressure measurement; no external gauge reading unit needed
- Direct mounting on customer's system (no vacuum pipes needed / improved conductance / HW cost saving)

Technical Specifications


		KF 40	ISO 63	CFF 4.5 in.
Pumping Speed (l/s) (with inlet screen)	N ₂	38	52	52
	He	30	50	50
	H ₂	24	35	35
Base pressure*		2 x 10 ⁻⁷ mbar	2 x 10 ⁻⁷ mbar	5 x 10 ⁻⁸ mbar
Bakeout temperature		80 °C at inlet	80 °C at inlet	120 °C at inlet
Shipping Weight lbs. (kg)		7.9 kg (17.4 lbs)	7.5 kg (16.4 lbs)	8.8 kg (19.4 lbs)
Pumpdown time (1 liter volume)		60 sec. to 17 mbar; 114 sec. to 1 x 10 ⁻⁴ mbar; 140 sec. to 5 x 10 ⁻⁵ mbar		
Turbo pump rotational speed		81.000 rpm		
Start-up time		122 sec.		
Operating position		Vertical, Horizontal, Upside down position		
Operating ambient temperature		5 °C to 35 °C / 32 °F to 122 °F		
Input Voltage and Frequency		90V to 240V AC; 50 Hz / 60 Hz		
Maximum input power		220 VA		
Serial communications		RS-232 cable, 9-pin D-type male, 9-pin D-type female, T-Plus Navigator Software		

* According to standard DIN 28 428

Pumping Speed vs Inlet Pressure

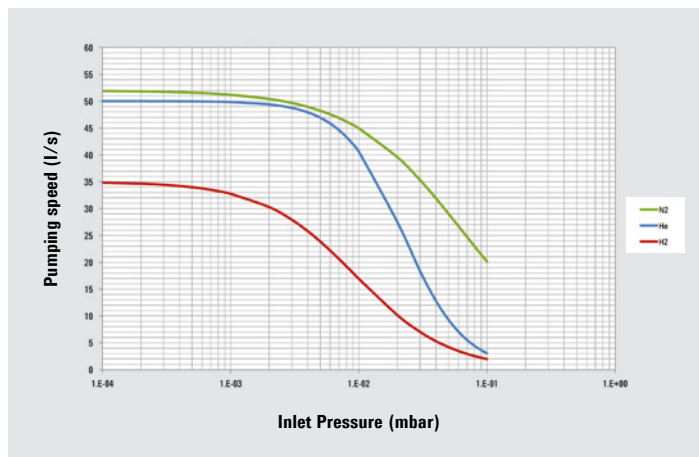

Pressure vs Time (with a pump down vol. of 1 lt.)

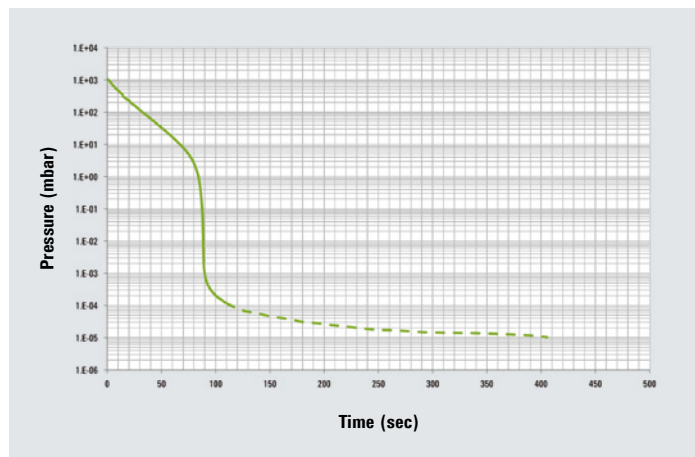

Ordering Information

	KF 40	ISO 63	CFF 4.5in
TPS-mini	G8703A#020	G8703A#021	G8703A#022
Accessories			
DIY Full Range Gauge Kit*	9699190	9699192	9699193
Connection kit-gauge	9699180	9699181	9699182
Mains cable EU plug**, 3 meters	9699957	9699957	9699957
Mains cable NEMA plug**, 3 meters	9699958	9699958	9699958
Serial Cable and T-Plus Software ***	9699883	9699883	9699883
Inlet Screen for TwisTorr 84 FS Turbo Pump	9699309	9699300	9699300


NOTE Special Vent Valve available on request

* The DIY Gauge Kit can be ordered separately, and includes Full Range Gauge FRG-700, Cable for gauge connection, Vacuum Tee and Connecting Hardware (Flanges according to the System inlet flange)

** Power Cord to be ordered separately

*** Software available for free download at: <http://www.chem.agilent.com/Library/software/Public/Agilent%20T-plus%201.2.4.exe.zip>

Outline Drawing

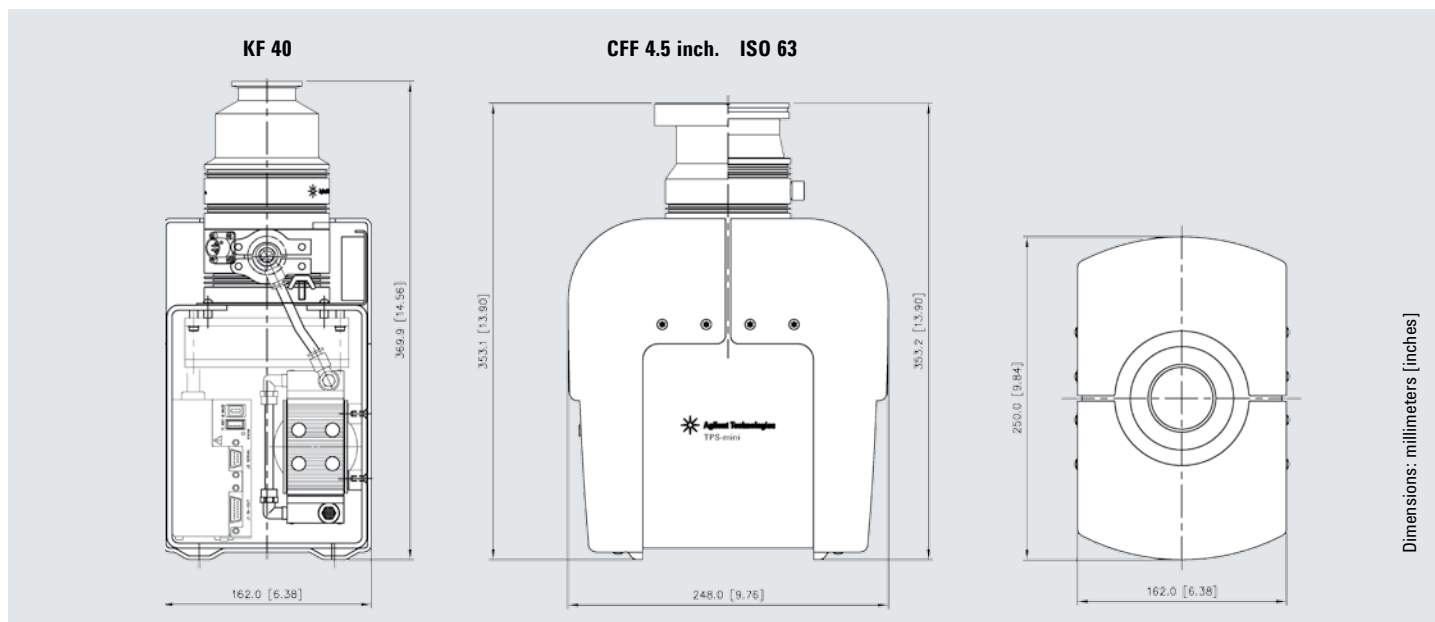

Agilent TPS-compact



A portable, fully Integrated, hydrocarbon-free pumping system powered by the innovative TwisTorr 84FS and 304 FS pumps, backed by the unique Agilent 60 l/min IDP-3 Dry Scroll, new generation primary pump: the fastest pumpdown in the market.

A cost effective pumping solution with large pressure display, Active Gauge capability, voltage 110-220 V, CE/CSA certified.

Features

- New generation TwisTorr 84FS and 304 FS Turbomolecular Pumps
- IDP-3 Dry Scroll backing pump
- Compact, light, dry, clean and robust system
- Nominal voltage (90-240 V) - CE/CSA certified
- RS-232 or analogical communication
- Wide range vacuum gauge driving capability
- Large pressure data display
- Pressure driven set point, analog set point
- Wheels option available

Benefits

- Designed for demanding applications
- Cost-effective pumping solution
- Easy to use: plug and play system; easy PLC & PC interface
- Complies with world-wide safety standards
- Easy system pressure measurement; no external gauge reading unit needed
- Easy Tip-seal replacement (10 min)
- Excellent base pressure, down to 10^{-9} mbar
- Easy to be moved in small space
- Highest compression ratio for H₂/He

Technical Specifications

	Equipped with TwisTorr 84 FS	Equipped with TwisTorr 304 FS
Pumping speed	N ₂ : 57 l/s (ISO 63, with inlet screen)*	N ₂ : 180 l/s (with inlet screen)*
Base Pressure**	1 x 10 ⁻⁹ mbar [CFF Flanges] 1 x 10 ⁻⁸ mbar [ISO Flanges]	1 x 10 ⁻⁹ mbar [CFF Flanges] 1 x 10 ⁻⁸ mbar [ISO Flanges]
Pumpdown Time (15 lt volume)	46 sec (100 mbar); 104 sec (1 mbar); 160 sec (1x10 ⁻⁴ mbar); 210 sec (5x10 ⁻⁵ mbar); 400 sec (1.3 x 10 ⁻⁵ mbar)	80 sec (16 mbar); 110 sec (3 mbar); 155 sec (6 x 10 ⁻⁵); 200 sec (1 x 10 ⁻⁵)
Turbo pump rotational speed	81.000 RPM	60.000 RPM
Start-up Time	144 sec.	150 sec.
Operating Ambient Temperature	5°C to 35°C	5°C to 35°C
Input Voltage and Frequency	115 Vac 60Hz or 220-240 Vac 50/60 hz	115 Vac 60Hz or 220-240 Vac 50/60 Hz or 100 Vac 50/60 Hz
Maximum Input Power	260 VA	310 VA
Bakeout Temperature	120°C at inlet [CFF Flanges] 80°C at inlet [KF/ISO Flanges]	120°C at inlet [CFF Flanges] 80°C at inlet [ISO Flanges]
Communication	RS232 - Analogical I/O	RS232 - Analogical I/O
Weight	16.7Kg [36.8 lbs]	20.1Kg [44.3 lbs]

* Pump nominal speed: TwisTorr 84FS N₂: 67 l/s; TwisTorr 304FS N₂: 250 l/s

** According to standard DIN 28 428

Ordering Information

TPS Compact	TwisTorr 84FS KF40	TwisTorr 84FS CFF 2.75"	TwisTorr 84FS ISO 63	TwisTorr 84FS CFF 4.5"	TwisTorr 304FS ISO 100	TwisTorr 304FS CFF 6"	TwisTorr 304FS ISO 160	TwisTorr 304FS CFF 8"
120 V	X3580A#010#020#120	X3580A#010#027#120	X3580A#010#021#120	X3580A#010#022#120	X3580A#011#023#120	X3580A#011#024#120	X3580A#011#025#120	X3580A#011#026#120
220 V	X3580A#010#020#220	X3580A#010#027#220	X3580A#010#021#220	X3580A#010#022#220	X3580A#011#023#220	X3580A#011#024#220	X3580A#011#025#220	X3580A#011#026#220
105 V	X3580A#010#020#105	X3580A#010#027#105	X3580A#010#021#105	X3580A#010#022#105	X3580A#011#023#105	X3580A#011#024#105	X3580A#011#025#105	X3580A#011#026#105

Accessories

Gauge Kit*	9699190	9699199	9699192	9699193	9699194	9699201	9699195	9699202
Inlet Screen	9699309	9699328	9699300	9699300	9699302	9699302	9699304	9699304

NOTE Special Vent Valve available on request


* The **DIY Full Range Gauge Kit** can be ordered separately, and includes Full Range Gauge FRG-700, Cable for gauge connection, Vacuum Tee and Connecting Hardware (Flanges according to the System inlet flange)

Other Accessories




Wheels accessory kit	9698233
Mains cable EU plug**, 3 meters	9699957

Mains cable NEMA plug**, 3 meters	9699958
Serial Cable and T-Plus Software	9699883


Pumping Speed vs Inlet Pressure

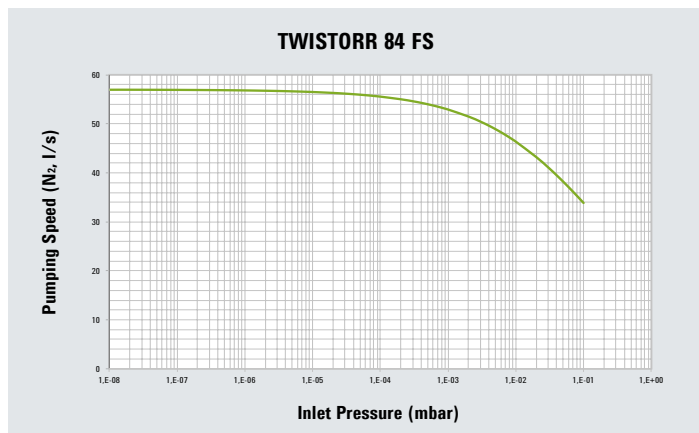

Pressure vs Time (with a pump down vol. of 15 lt.)

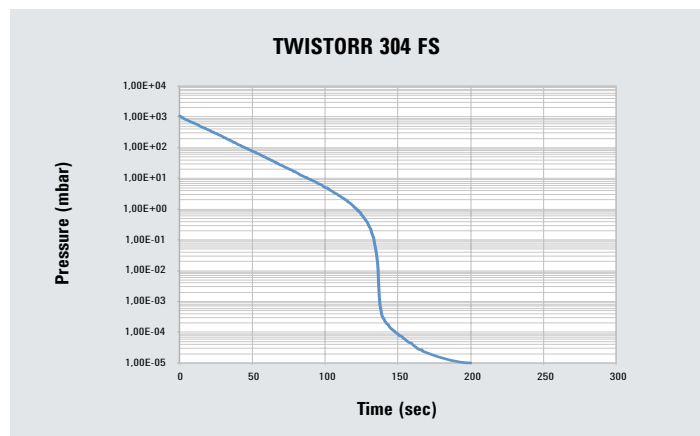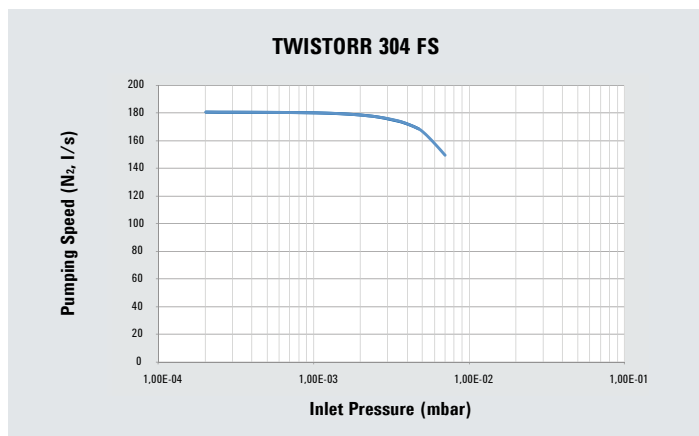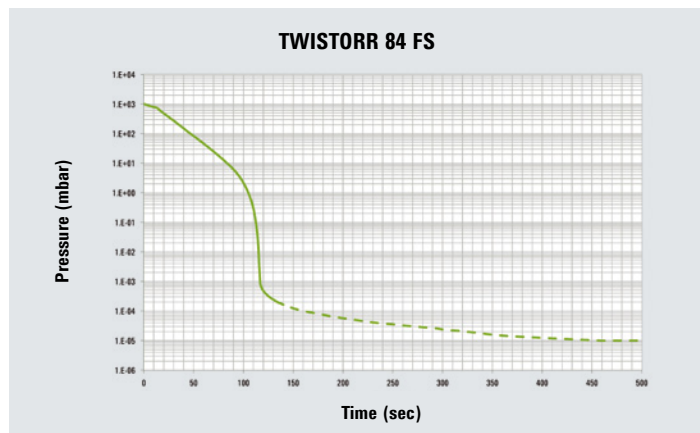

Outline Drawing

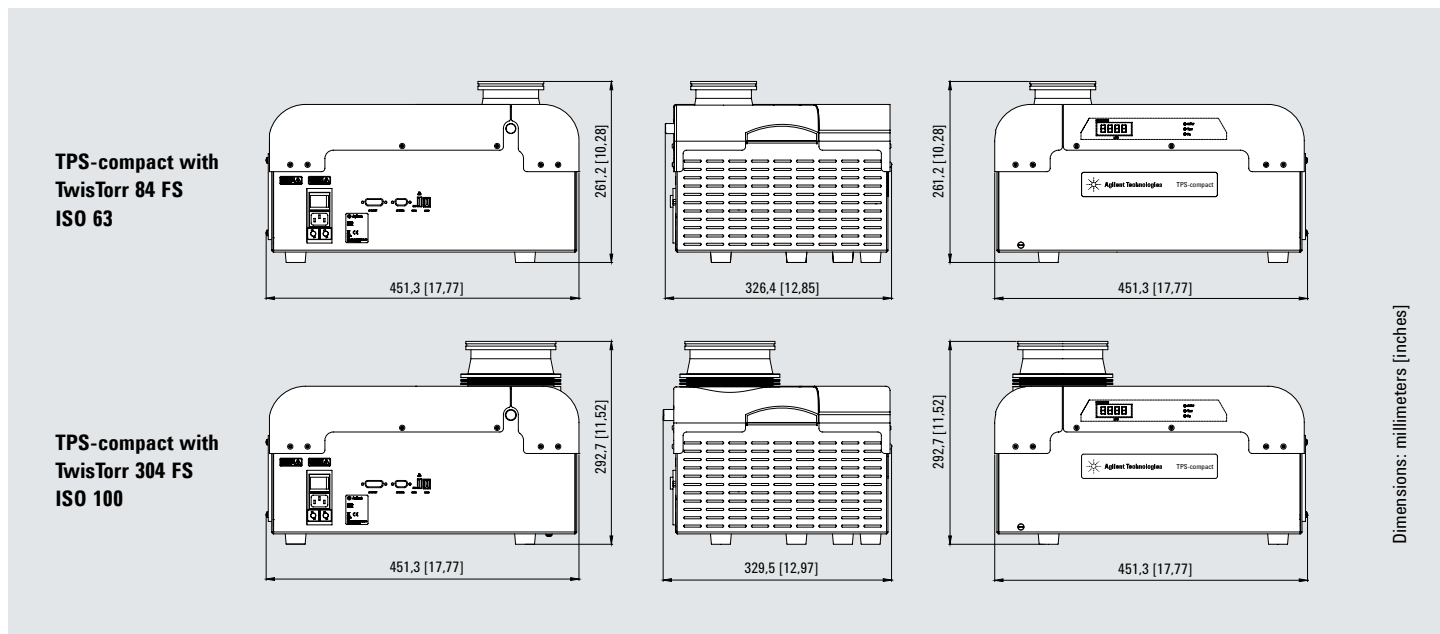

Agilent TPS-bench



Flexible table-top, compact and reliable vacuum solutions.

72 possible standard configurations with the new TwisTorr 84 FS and 304 FS Turbo Pumps, backed by Agilent Dry Scroll and Rotary Vane Pumps, ensure top vacuum performance, and fast vacuum chamber roughing.

Gauges and accessories available. T-Plus Software, and Isolation valve integrated/included.

Voltage 110/230V. CE, UL/CUL, CSA and Semi S2-0200 certified.

Applications include UHV System pump down, Ion pump roughing, Lamp and tube processing, Cryopump regeneration, High Vacuum Systems operation, High and Ultra High Vacuum systems bake out.

Turbomolecular Pumps - Pumping Speed

	TwisTorr 84 FS KF 40, ISO 63, CFF 2¼", CFF 4½"	TwisTorr 304 FS ISO 100, CFF 6", ISO 160, CFF 8"
Pumping Speed	N ₂ : 57 l/s (with inlet screen)*	N ₂ : 180 l/s (with inlet screen)*

* Pump nominal speed: TwisTorr 84FS N₂: 67 l/s; TwisTorr 304FS N₂: 250 l/s

Base Pressure

	TwisTorr 84 FS	TwisTorr 304 FS
Primary Pumps Dry	5.0×10^{-9} mbar (3.75×10^{-9} Torr)	$< 1.0 \times 10^{-10}$ mbar ($< 7.5 \times 10^{-11}$ Torr)
Primary Pumps Mechanical	5.0×10^{-10} mbar (3.75×10^{-10} Torr)	$< 1.0 \times 10^{-10}$ mbar ($< 7.5 \times 10^{-11}$ Torr)

* According to standard DIN 28 428

Pumpdown time


TPS-bench with TwisTorr 84 FS ISO 63 and SH 110 Scroll Pump

Pumpdown Time (15 liter volume)	34 sec	(100 mbar)
	76 sec	(1 mbar)
	120 sec	(1×10^{-4} mbar)
	160 sec	(5×10^{-5} mbar)
	400 sec	(1×10^{-5} mbar)

TPS-bench with TwisTorr 304 FS ISO 100 and SH 110 Scroll Pump

Pumpdown Time (15 liter volume)	40 sec	(45 mbar)
	60 sec	(7 mbar)
	80 sec	(5×10^{-1} mbar)
	100 sec	(8×10^{-5} mbar)
	115 sec	(1×10^{-5} mbar)

Pressure vs Time (with a pump down vol. of 15 lt.)

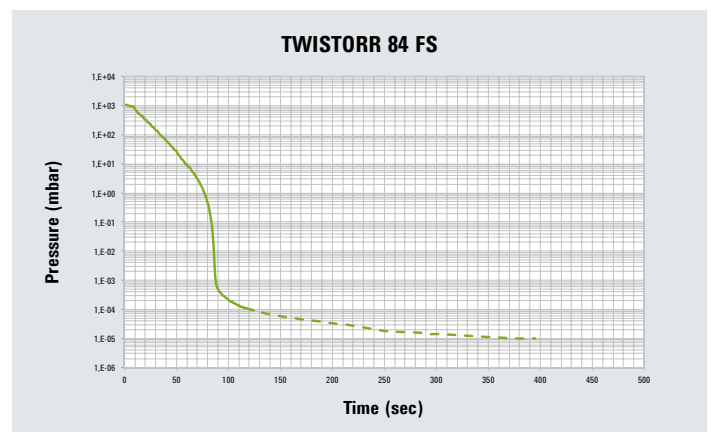

TPS-bench standard configurations

TPS-bench	TwisTorr 84 FS KF 40	TwisTorr 84 FS ISO 63	TwisTorr 84 FS CFF 2 3/4"	TwisTorr 84 FS CFF 4 1/2"	TwisTorr 304 FS ISO 100	TwisTorr 304 FS CFF 6"	TwisTorr 304 FS ISO 160	TwisTorr 304 FS CFF 8"
DS 102 - 120 V	●	●	●	●	●	●	●	●
DS 102 - 220 V	●	●	●	●	●	●	●	●
DS 202 - 120 V	●	●	●	●	●	●	●	●
DS 202 - 220 V	●	●	●	●	●	●	●	●
DS 302 - 120 V	●	●	●	●	●	●	●	●
DS 302 - 220 V	●	●	●	●	●	●	●	●
IDP-3 - 120 V	●	●	●	●				
IDP-3 - 220 V	●	●	●	●				
SH 110 - 120 V	●	●	●	●	●	●	●	●
SH 110 - 220 V	●	●	●	●	●	●	●	●

Ordering Information available on request: call Agilent for details

Turbomolecular Pumps

Turbo Pump Model	Inlet Flange
TwisTorr 84 FS Pump	ISO 63, KF 40*, CFF 2.75"*, CFF 4.5"*
TwisTorr 304 FS Pump	ISO 100, CFF 6", ISO 160, CFF 8"*

*Configuration available on request.

Primary Pumps

Dry Scroll Pumps	Peak Pumping Speed 50 Hz
SH 110, single phase	90 l/min - 5.4 m ³ /h - 3.3 cfm
IDP-3, single phase	50 l/min - 3.0 m ³ /h - 1.8 cfm

Rotary Vane Dual Stage Pumps	Pumping Speed 50 Hz
DS 102 - 1 phase worldwide motor	5.0 m ³ /h
DS 202 - 1 phase worldwide motor	8.3 m ³ /h
DS 302 - 1 phase worldwide motor	11.6 m ³ /h

Managing Gauges


GAUGE KIT	Inlet Flange	DIY FRG-700 Full Range Gauge Kit (atmosphere to 3.8 x 10 ⁻⁹ Torr)
TwisTorr 84 FS	KF 40	9699190
	ISO 63	9699192
	CFF 2.75"	9699199
TwisTorr 304 FS	CFF 4.5"	9699193
	ISO 100	9699194
	CFF 6"	9699201
	ISO 160	9699195
	CFF 8"	9699202

For other gauge configurations, please contact your local Agilent representative

Cables

Power cords are included free of charge in all TPS-bench and TPS-mobile models, with US, EU or UK plug.

Outline Drawing

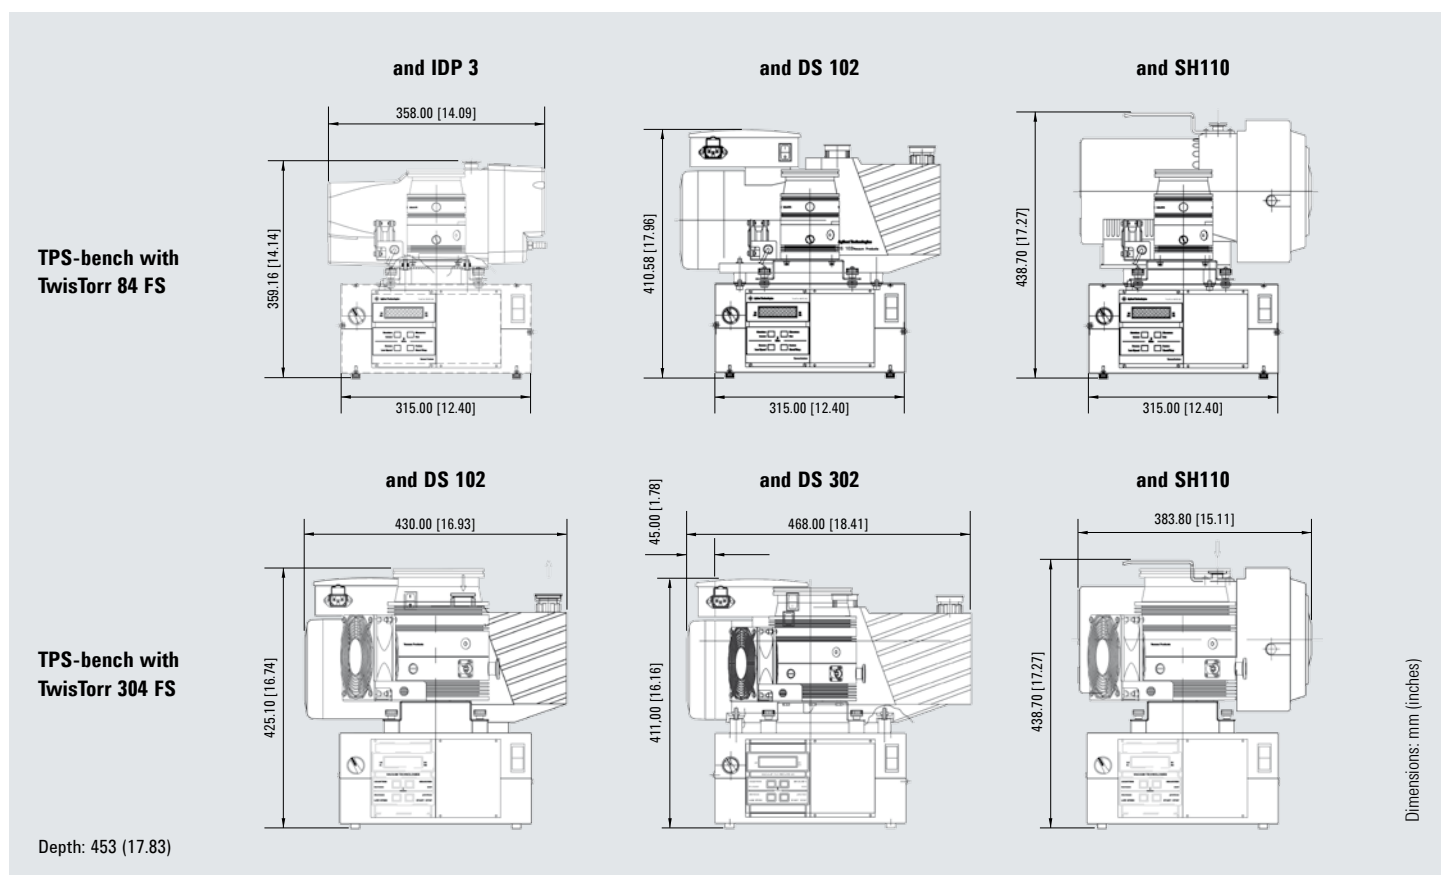

Agilent TPS-mobile



Roll-around cart, high capacity systems, with higher compression ratio and wide pumping speed range.

160 possible configurations, with the new TwisTorr 84 FS and 304 FS, and the Turbo-V 551 Navigator Turbo Pumps, backed by Agilent Dry Scroll Pumps (including the new IDP-15) or DS Mechanical Pumps. Large selection of gauges and accessories available for customized solutions.

T-Plus Software, Isolation valve integrated/included.

Voltage 110/230V. CE, UL/CUL, CSA and Semi S2-0200 certified.

Applications include UHV System pump down, Ion pump roughing, Lamp and tube processing, Cryopump regeneration, High Vacuum Systems operation, High and Ultra High Vacuum systems bake out

Turbomolecular Pumps - Pumping Speed*

	TwisTorr 84 FS	TwisTorr 304 FS	Turbo-V 551 Navigator
	KF 40, ISO 63, CFF 2¾", CFF 4½"	ISO 100, CFF 6", ISO 160, CFF 8"	ISO 100, CFF 6", ISO 160, CFF 8"
Pumping Speed	N ₂ : 57 l/s (with inlet screen)*	N ₂ : 180 l/s (with inlet screen)*	N ₂ : 550 l/s (with inlet screen)

* Pump nominal speed: TwisTorr 84FS N₂: 67 l/s; TwisTorr 304FS N₂: 250 l/s.

Base Pressure

	TwisTorr 84 FS	TwisTorr 304 FS	Turbo-V 551 Navigator
With SH110 Dry Scroll Pump	5.0 x 10 ⁻⁹ mbar (3.75 x 10 ⁻⁹ Torr)	< 1.0 x 10 ⁻¹⁰ mbar (< 7.5 x 10 ⁻¹¹ Torr)	< 1.0 x 10 ⁻¹⁰ mbar (< 7.5 x 10 ⁻¹¹ Torr)
With DS-102 Rotary Vane Pump	5.0 x 10 ⁻¹⁰ mbar (3.75 x 10 ⁻¹⁰ Torr)	< 1.0 x 10 ⁻¹⁰ mbar (< 7.5 x 10 ⁻¹¹ Torr)	< 1.0 x 10 ⁻¹⁰ mbar (< 7.5 x 10 ⁻¹¹ Torr)

* According to standard DIN 28 428

Pumpdown time


TPS-mobile with TwisTorr 84 FS ISO 63 and SH 110 Scroll Pump

Pumpdown Time (15 liter volume)	34 sec	(100 mbar)
	76 sec	(1 mbar)
	120 sec	(1 x 10 ⁻⁴ mbar)
	160 sec	(5 x 10 ⁻⁵ mbar)
	400 sec	(1 x 10 ⁻⁵ mbar)

TPS-mobile with TwisTorr 304 FS ISO 100 and SH 110 Scroll Pump

Pumpdown Time (15 liter volume)	40 sec	(50 mbar)
	60 sec	(8 mbar)
	80 sec	(7 x 10 ⁻¹ mbar)
	100 sec	(1 x 10 ⁻⁴ mbar)
	130 sec	(1 x 10 ⁻⁵ mbar)

Pressure vs Time (with a pump down vol. of 15 lt.)

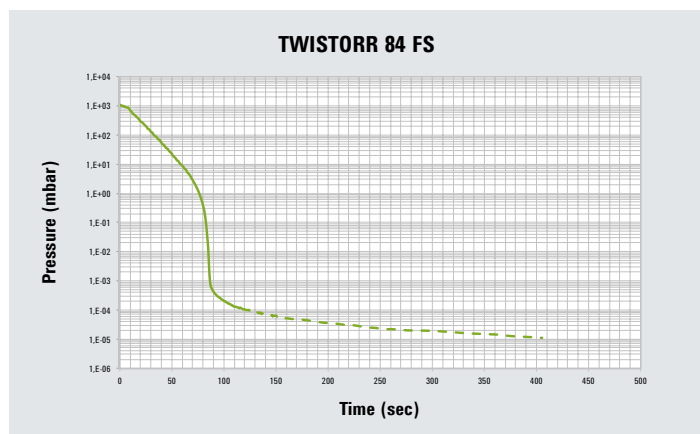

TPS-mobile standard configurations

TPS-mobile	TwisTorr 84 FS KF 40	TwisTorr 84 FS ISO 63	TwisTorr 84 FS CFF 2 3/4"	TwisTorr 84 FS CFF 4 1/2"	TwisTorr 304 FS ISO 100	TwisTorr 304 FS CFF 6"	TwisTorr 304 FS ISO 160	TwisTorr 304 FS CFF 8"	TV551 ISO 100	TV551 CFF 6"	TV551 ISO 160	TV551 CFF 8"
DS 102 - 120 V	●	●	●	●	●	●	●	●				
DS 102 - 220 V	●	●	●	●	●	●	●	●				
DS 202 - 120 V	●	●	●	●	●	●	●	●				
DS 202 - 220 V	●	●	●	●	●	●	●	●				
DS 302 - 120 V					●	●	●	●	●	●	●	●
DS 302 - 220 V					●	●	●	●	●	●	●	●
DS 402 - 120 V					●	●	●	●	●	●	●	●
DS 402 - 220 V					●	●	●	●	●	●	●	●
DS 602 - 120 V					●	●	●	●	●	●	●	●
DS 602 - 220 V					●	●	●	●	●	●	●	●
IDP-3 - 120 V	●	●	●	●	●	●	●	●				
IDP-3 - 220 V	●	●	●	●	●	●	●	●				
SH 110 - 120 V	●	●	●	●	●	●	●	●				
SH 110 - 220 V	●	●	●	●	●	●	●	●				
IDP-15 - 120 V					●	●	●	●	●	●	●	●
IDP-15 - 220 V					●	●	●	●	●	●	●	●
TS 300 VPI - 120 V					●	●	●	●	●	●	●	●
TS 300 VPI - 220 V					●	●	●	●	●	●	●	●
TS 600 VPI - 120 V					●	●	●	●	●	●	●	●
TS 600 VPI - 220 V					●	●	●	●	●	●	●	●

Ordering Information available on request: call Agilent for details

Turbomolecular Pumps

Turbo Pump Model	Inlet Flange
TwisTorr 84 FS Pump	ISO 63, KF 40*, CFF 2 3/4", CFF 4 1/2"
TwisTorr 304 FS Pump	ISO 100, CFF 6", ISO 160, CFF 8"
Turbo-V 551 Navigator	ISO 100, CFF 6", ISO 160, CFF 8"

*Configuration available on request

Primary Pumps

Dry Scroll Pumps	Peak Pumping Speed 50 Hz
IDP-3, single phase	50 l/min - 3.0 m ³ /h - 1.8 cfm
SH 110, single phase	90 l/min - 5.4 m ³ /h - 3.3 cfm
TriScroll 300, single phase, with Vacuum Pump Isolation Valve (VPI)	210 l/min - 12.6 m ³ /h - 7.4 cfm
TriScroll 600, single phase, with Vacuum Pump Isolation Valve (VPI)	420 l/min - 25.2 m ³ /h - 14.8 cfm
IDP-15, single phase	214 l/min - 12.8 m ³ /h - 7.5 cfm
Rotary Vane Dual Stage Pumps	Pumping Speed 50 Hz
DS 102 - 1 phase worldwide motor	5.0 m ³ /h
DS 202 - 1 phase worldwide motor	8.3 m ³ /h
DS 302 - 1 phase worldwide motor	11.6 m ³ /h
DS 402 - 1 phase worldwide motor	17.4 m ³ /h
DS 602 - 1 phase worldwide motor	25.0 m ³ /h

Managing Gauges


GAUGE KIT	Inlet Flange	DIY FRG-700 Full Range Gauge Kit (atmosphere to 3.8 x 10 ⁻⁹ Torr)
TwisTorr 84 FS	KF 40	9699190
	ISO 63	9699192
	CFF 4 1/2"	9699193
TwisTorr 304 FS and Turbo-V 551 Navigator	ISO 100	9699194
	CFF 6"	9699201
Turbo-V 551 Navigator	ISO 160 K	9699195
	CFF 8"	9699202

For other gauge configurations, please contact your local Agilent representative

Cables

Power cords are included free of charge in all TPS-bench and TPS-mobile models, with US, EU or UK plug.

Outline Drawing

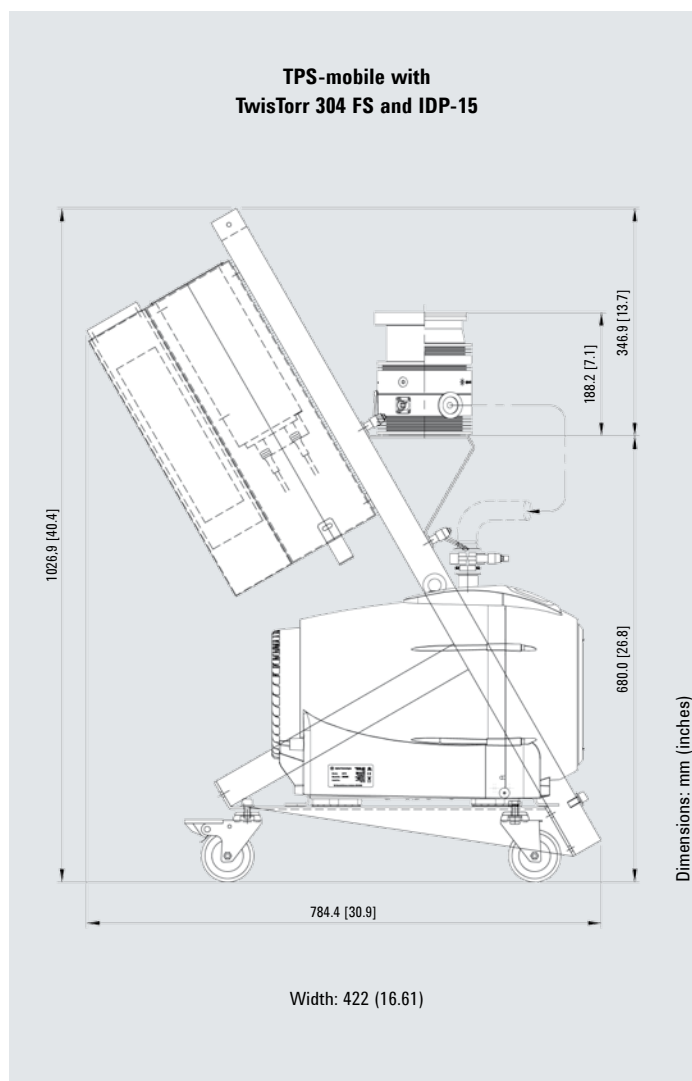

Agilent TPS - Turbo Pumping Systems

The New Integrated Pumping Solutions with TwisTorr FS Technology

Agilent Technologies

United States

Agilent Technologies
121 Hartwell Avenue,
Lexington MA 02421, USA
Tel: +1 781 861 7200
Fax: +1 781 860 5437
Toll free: +1 800 882 7426
vpl-customer@agilent.com

China

Beijing Office

Agilent Technologies (China) Co. Ltd
No.3, Wang Jing Bei Lu, Chao Yang District,
Beijing, 100102, China
Tel: +86 (0)10 6439 7888
Fax: +86 (0)10 6439 2765
Toll free: 800 820 3278
vacuum.cnmarketing@agilent.com
vpc-customer@agilent.com

Shanghai Office

Agilent Technologies
16F Shanghai Litong Plaza,
No.1350 North Si Chuan Road,
Hongkou District,
Shanghai, 200080, China
Tel: +86 (0)21 3612 7688
Fax: +86 (0)21 6628 5169
Toll free: 800 820 3278

Guangzhou Office

Agilent Technologies
Unit 08, 66/F, Citic Plaza,
233 Tian He Bei Rd
Guangzhou, 510613, China
Tel: +86 (0)20 38113988
Fax: +86 (0)20 86695861
Toll free: 800 820 3278

Shenzhen Office

Agilent Technologies
3/F Dutyfree Business Bldg.,
No.6, 1st Fu Hua Road, Futian CBD
Shenzhen, 518048
Tel: +86 (0)755 8307 9588
Fax: +86 (0)755 8276 3182
Toll free: 800 820 3278

Brazil

Agilent Technologies Brasil
Avenida Marcos Penteado de Ulhoa
Rodrigues, 939 - 6° andar
Castelo Branco Office Park
Torre Jacarandá - Tamboré
Barueri, Sao Paulo CEP: 06460-040
Toll free: 0800 728 1405

Benelux

Agilent Technologies Netherlands BV
Groenelaan 5, 1186 AA Amstelveen
The Netherlands
Tel: +31 20 547 2000
Fax: +31 20 547 2093
Toll free: 00 800 234 234 00

France

Agilent Technologies
Parc Technopolis - Z.A. de Courtaboeuf
3, avenue du Canada - CS 90263
91978 Les Ulis cedex, France
Tel: +33 (0) 1 64 53 61 15
Fax: +33 (0) 1 64 53 50 01
Toll free: 00 800 234 234 00
vpf.sales@agilent.com

Germany and Austria

Agilent Technologies
Sales & Services GmbH & Co. KG
Lyoner Str. 20
60 528 Frankfurt am Main, Germany
Tel: +49 69 6773 43 2230
Fax: +49 69 6773 43 2250

India

Agilent Technologies India Pvt Ltd
Unit Nos 105-116
First Floor, Splendor Forum,
Plot No.-3, District Centre, Jasola
New Delhi-110025
Ph: +91 11 4623 7100
Fax: +91 4623 7105
Toll Free: 18001801517

Italy

Agilent Technologies Italia SpA
via F.lli Varian 54
10040 Leini (Torino), Italy
Tel: +39 011 9979 111
Fax: +39 011 9979 350
Toll free: 00 800 234 234 00
vpl-customer@agilent.com

Japan

Agilent Technologies Japan, Ltd.
9-1 Takakura-cho Hachioji-city
Tokyo Japan
Tel: +81 3 5232 1253
Fax: +81 - 120-565-154
Toll free: +81 - 120-477-111
jp-vvt-sales.pdl-ext@agilent.com

Korea

Agilent Technologies Korea Ltd.
Shinsa 2nd Bldg. 1F, 966-5 Daechi-dong
Kangnam-gu, Seoul, Korea 135-280
Tel: +82 (0)2 2194 9449
Fax: +82 (0)2 3452 3947
Toll free: 080 222 2452
vpk-customer@agilent.com

Mexico

Agilent Technologies
Concepcion Beistegui No 109
Col Del Valle, C.P. 03100, Mexico, D.F.
Tel: +52 5 523 9465
Fax: +52 5 523 9472

Singapore

Agilent Technologies Singapore Pte Ltd.
No.1 Yishun Avenue 7, Singapore 768923
Tel: +65 6215 8045
Fax: +65 6754 0574
Toll free: 1 800 2762622
vps-customer@agilent.com

Southeast Asia

Agilent Technologies Sales Sdn Bhd
Unit 201, Level 2 uptown 2,
2 Jalan SS21/37, Damansara Uptown
47400 Petaling Jaya, Selangor, Malaysia
Tel: +60 3 7712 6106
Fax: +60 3 6733 8121
Toll free: 1 800 880 805
vps-customer@agilent.com

Taiwan

Agilent Technologies Taiwan Limited
20 Kao-Shuang Road Ping-Chen City
Tao-Yuan Hsien,
32450 Taiwan, R.O.C.
Tel: +886 3 4959204
vacuum.cnmarketing@agilent.com

UK and Ireland

Agilent Technologies UK Ltd.
6 Mead Road, Oxford Industrial Park
Yarnton, Oxford OX5 1QU, UK
Tel: +44 (0) 1865 291570
Fax: +44 (0) 1865 291571
Toll free: 00 800 234 234 00



This information is subject to change without notice

© Agilent Technologies, Inc. 2015
Published May 2015
VPD0315EN



Agilent Technologies